



High-frequency transformer

EEL19 Series

Parameters/Dimensions:

EEL19 Type 1

Information:


Shape:EEL19

1 Power: 22W

2 Mounting Orientation: Vertical

3 Size: 25 (W) * 23(L) * 33 (H)

4 Effective Ae (mm²): 25.0

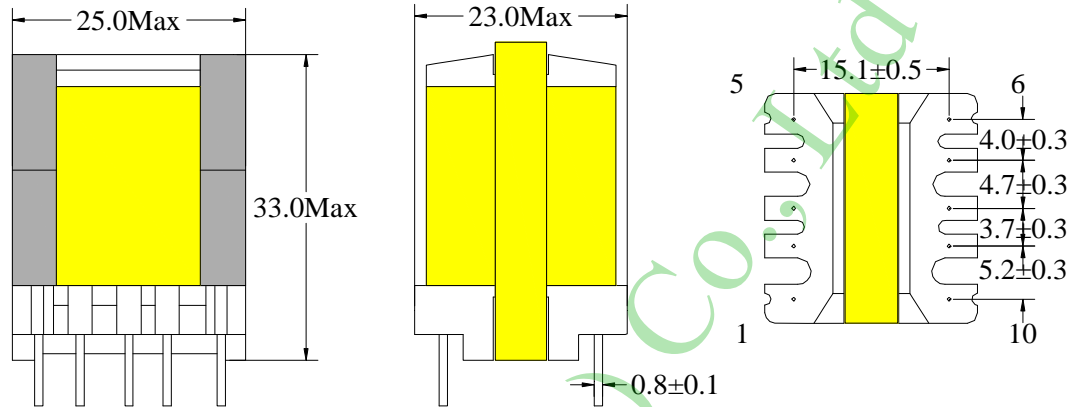

EEL19 Type 2

Information:


Shape:EEL19

1 Power: 22W

2 Mounting Orientation: Horizontal

3 Size: 21 (W) * 33 (L) * 15 (H)

4 Effective Ae (mm²): 25.0

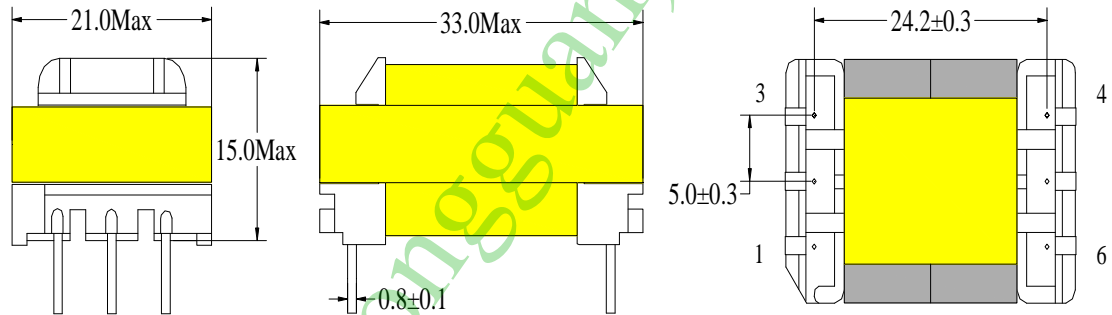

EEL19 Type 3

Information:


Shape:EEL19

1 Power: 22W

2 Mounting Orientation: Horizontal

3 Size: 23 (W) * 33(L) * 17(H)

4 Effective Ae (mm²): 25.0

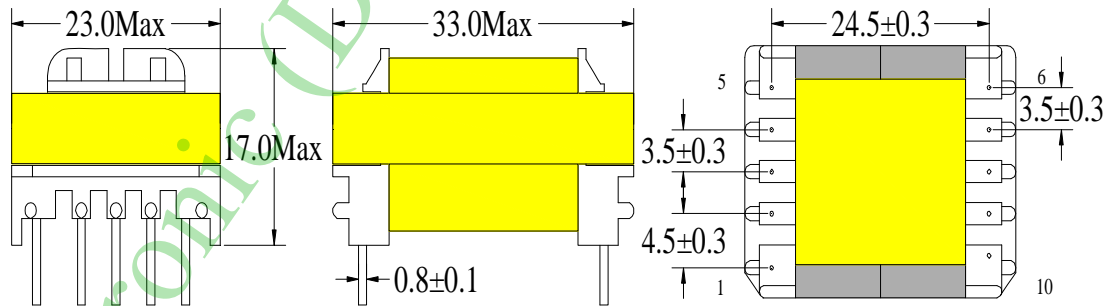

Note:

Bobbin type listed in the traditional style, transformer design parameters to customer needs or to inject prevail.

EEL series high-frequency transformer features:

Lead space, easy winding wire. Applicable to a wide range of high frequency, wide operating voltage range, output power, good thermal stability.

Uses:

Widely used in PBX power, LCD power supply, UPS power inverter power supply, computer power, energy-saving lamps and other fields