



High-frequency transformer SMD EFD20 Series

Parameters/Dimensions:

SMD EFD20 Type 1

Information:


Shape: EFD20

1 Power:22W

2 Mounting Orientation: Horizontal

3 Size: 22(W) * 23(L) * 11 (H)

4 Effective Ae (mm²): 31.4

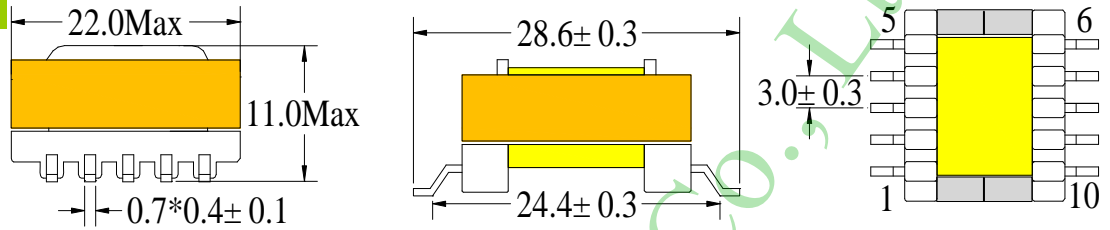

SMD EFD20 Type 2

Information:


Shape: EFD20

1 Power:22W

2 Mounting Orientation:Horizontal

3 Size: 22(W) * 23(L) * 11 (H)

4 Effective Ae (mm²): 31.4

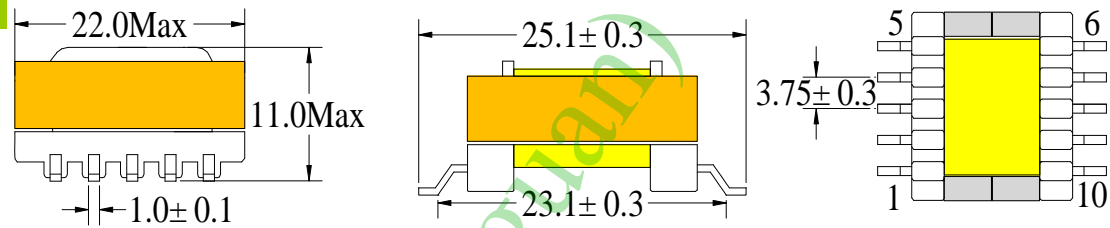

SMD EFD20 Type 3

Information:


Shape: EFD20

1 Power:22W

2 Mounting Orientation:Horizontal

3 Size: 22(W) * 23(L) * 11 (H)

4 Effective Ae (mm²): 31.4

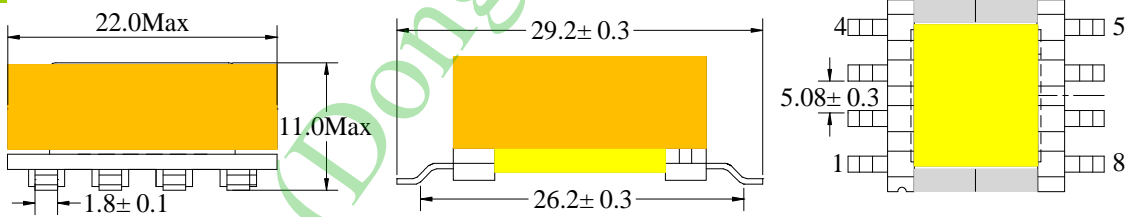

SMD EFD20 Type 4

Information:


Shape: EFD20

1 Power:22W

2 Mounting Orientation:Horizontal

3 Size: 26(W) * 23(L) * 11.5 (H)

4 Effective Ae (mm²): 31.4

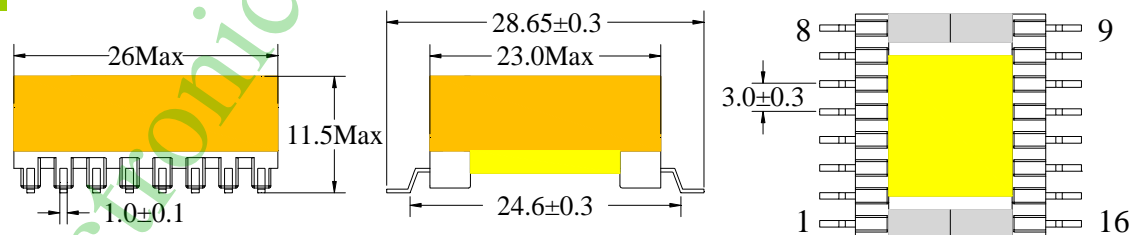

Note:

Bobbin type listed in the traditional style, transformer design parameters to customer needs or to inject prevail.

EFD series high-frequency transformer features:

Has a low thermal resistance, low attenuation, high power, wide frequency range, light weight, reasonable structure, easy surface mount, good shielding effect, etc., but somewhat less heat dissipation.

Uses:

Widely used in small and large power and shielding and electromagnetic compatibility requirements of transformers, such as precision instruments, PABX power modules, navigation equipment.